

# SO-FLEX HEATED TOWEL RAILS


SO-FLEX goes beyond the basic idea of a towel heater (order and folding) and introduces a new concept: practical disorder,

careless gestures and the fun of not having to fold everything, but simply chuck a used towel into a warm shell.



design Gabriella Almagioni  
Like the folded-back corner of a sheet of metal, SO-FLEX invents a truly creative function: a great way to be different.

## DIMENSIONS


Width 44/53/62/80/120 cm  
Height 77/130/180 cm  
Depth 11 cm  
Depth from wall 14 cm

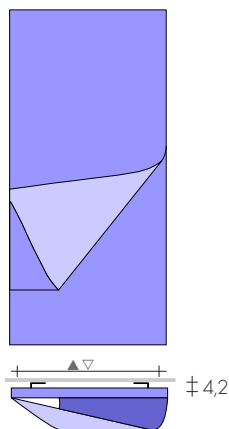

SO-FLEX 130-..

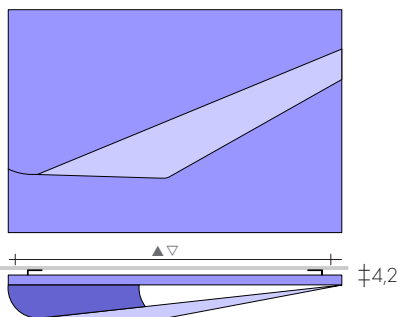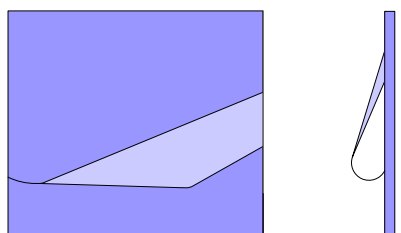

SO-FLEX 70 - 80  
SO-FLEX 70 - 120

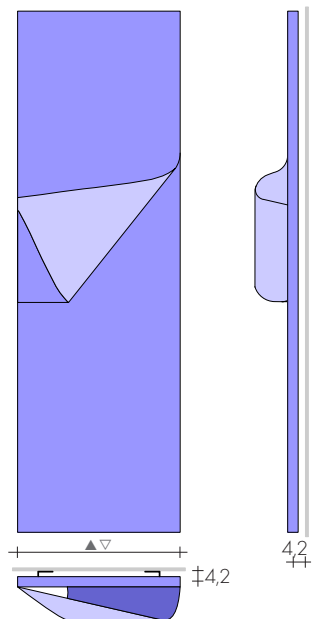

SO-FLEX 180-..

MODEL	HL cm	white sablé standard €	EN 442 Δt 50 K watt	▲ ▽ t.c. •cm	Height H cm	Width L cm	Weight M Kg	Volume V dm³	MIXED VERSION cl.II E.H.E. for mixed valve* W €
SO-FLEX	70-80	993,90	635	76,8	70	80	17,9	5,6	650 91,00
SO-FLEX	70-120	1136,00	944	116,8	70	120	26,5	7,9	900 98,10
SO-FLEX	130-44	892,30	643	40,1	130	44	18,2	6,0	650 91,00
SO-FLEX	130-53	949,60	770	48,8	130	53	21,8	6,8	800 95,00
SO-FLEX	180-44	984,70	887	40,1	180	44	25,1	8,1	900 98,10
SO-FLEX	180-53	1072,80	1061	48,8	180	53	30,0	9,2	- -
SO-FLEX	180-62	1159,90	1233	57,5	180	62	34,9	10,3	1200 105,10

•Angled Brem valves

\*or TR accessory;  
digital thermostat page 243

SABLE' COLORS ARE RECOMMENDED  
(as they make the fold softer to the touch)

## STANDARD PRODUCTION

White "sablé" paintwork - white EOS brackets  
Tolerance ± 3mm - Air vent ø 1/8"  
MAXIMUM OPERATING PRESSURE 4 BAR

## PRODUCTION ON REQUEST

Paintwork to BREM color list  
with colored brackets  
Special fittings, page 292,293

+15/25%

## STANDARD FITTING

EG ø 3/8"  
BREM valves, page 294  
Electric version e.So-flex, p. 273

