

SHAR


SHAR has all the main characteristics of a traditional heated towel rail. Its aesthetic

harmony arises from the semi-oval shape of the manifolds, which are reduced to minimum


dimensions and with radiating tubes of \varnothing 15 mm, they portray lightness and solidity.

DIMENSIONS


Width 33 / 45 / 50 / 60 / 75 / 90 cm
 Height 71,8 / 110,3 / 140,6 / 181,8 cm
 Depth 3 cm
 Depth from wall 10,5 cm




SHAR 70-...



SHAR 110-...

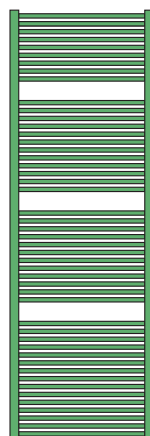

SHAR 140-...

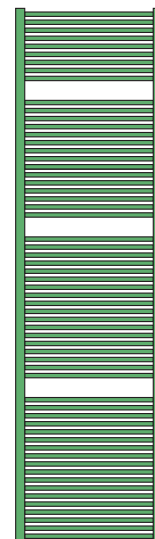

SHAR 180-...

MODEL	Hl cm	white sablé standard €	EN 442 Δt 50 K watt	$\blacktriangle \nabla$ t.c. •cm	Height H cm	Width L cm	Weight M Kg	Volume V dm ³	MIXED VERSION cl.II* Electric Heating Element W	€
SHAR	70-45	309,10	353	42	71,8	45	4,9	3,12	400	87,30
SHAR	70-50	317,60	389	47	71,8	50	5,3	3,27	400	87,30
SHAR	70-60	330,20	458	57	71,8	60	6,1	3,59	500	89,10
SHAR	70-75	357,50	552	72	71,8	75	7,4	4,07	500	89,10
SHAR	110-45	401,70	526	42	110,3	45	7,4	4,74	500	89,10
SHAR	110-50	411,90	580	47	110,3	50	8,0	4,97	650	91,00
SHAR	110-60	430,30	684	57	110,3	60	9,2	5,45	650	91,00
Slim SHAR	140-33	473,10	468	30	140,6	33	7,3	4,51	500	89,10
SHAR	140-45	505,20	653	42	140,6	45	9,3	6,00	650	91,00
SHAR	140-50	519,00	720	47	140,6	50	10,0	6,29	800	95,00
SHAR	140-60	541,10	851	57	140,6	60	11,6	6,88	900	98,10
Slim SHAR	180-33	578,30	618	30	181,8	33	9,7	4,89	650	91,00
SHAR	180-45	617,60	870	42	181,8	45	12,2	7,85	900	98,10
SHAR	180-50	634,60	955	47	181,8	50	13,2	8,24	900	98,10
SHAR	180-60	662,30	1126	57	181,8	60	15,3	9,03	1200	105,10
SHAR	180-75	705,70	1363	72	181,8	75	18,1	10,21	1500	114,30
SHAR	180-90	748,20	1640	87	181,8	90	21,1	11,40	-	-
S-CROM	70-50	727,70	311	47	71,8	50	5,3	3,27	-	-
S-CROM	110-50	943,80	464	47	110,3	50	8,0	4,97	500	89,10
S-CROM	140-33	1082,70	374	30	140,6	33	7,3	4,51	400	87,30
S-CROM	140-50	1189,60	576	47	140,6	50	10,0	6,29	650	91,00
S-CROM	180-33	1326,10	494	30	181,8	33	9,7	4,89	500	89,10
S-CROM	180-50	1452,80	764	47	181,8	50	13,2	8,24	800	95,00
S-CROM	180-60	1515,70	901	57	181,8	60	15,3	9,03	900	98,10

Made-to-measure versions on request

*Only with mixed valve or T accessory p.243

STANDARD PRODUCTION

White "sablé" paintwork-white brackets M8
 Chrome-plated finish with chrome brackets
 Tolerance \pm 3 mm - Air vent \varnothing 1/8"
 MAXIMUM OPERATING PRESSURE 8 BAR

PRODUCTION ON REQUEST

Paint to Brem color list with chrome-plated
 brackets +15/25%
 Special / made-to-measure fittings p. 292
 Side fittings ($\blacktriangle \nabla$ H-4cm) Art. AS 70,40€

STANDARD FITTINGS

EG \varnothing 1/2"
 Shar DIVIS, page 234
 Brem valves, page 295
 Electrical version e.Shar, page 283

